



COTAC FINLAND



GMK 6200

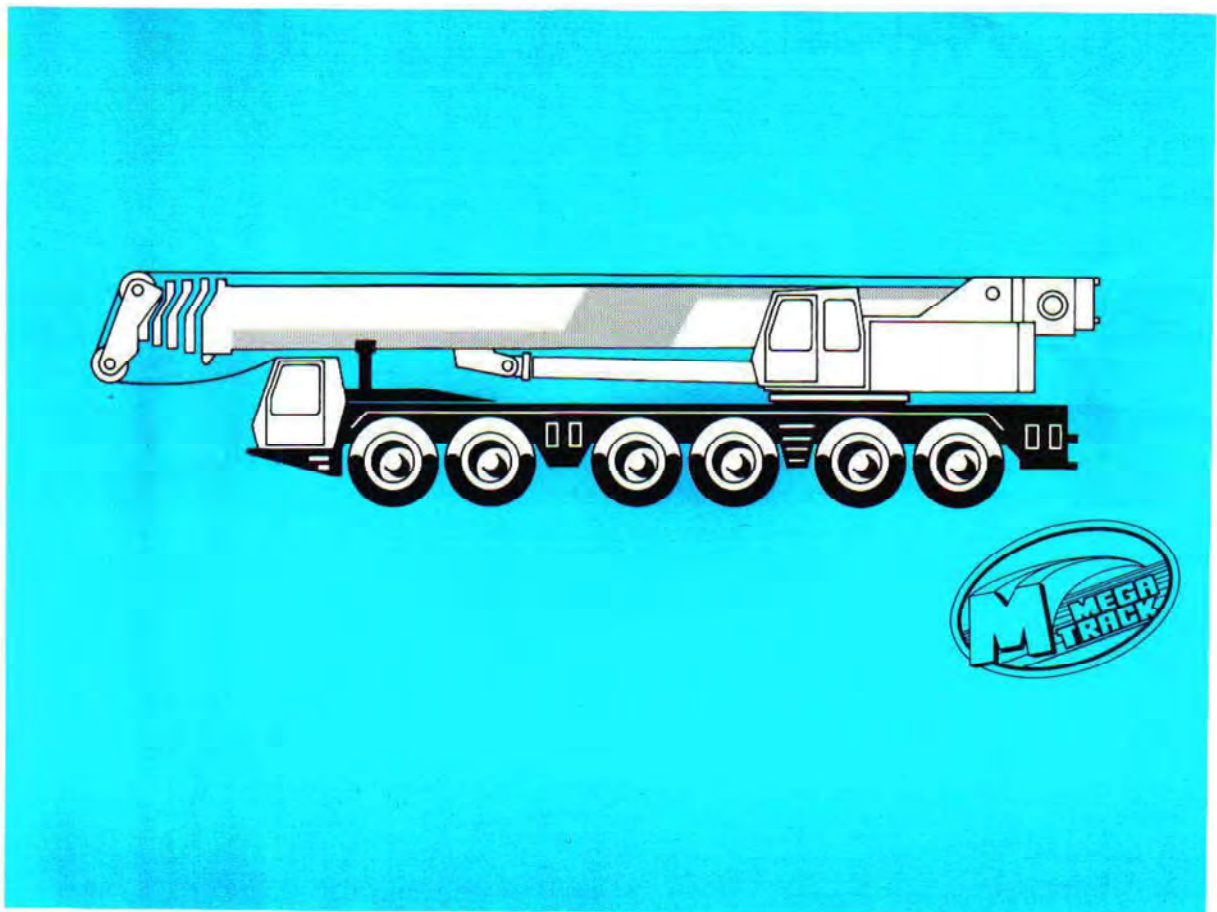

MAIN BOOM OUTREACH

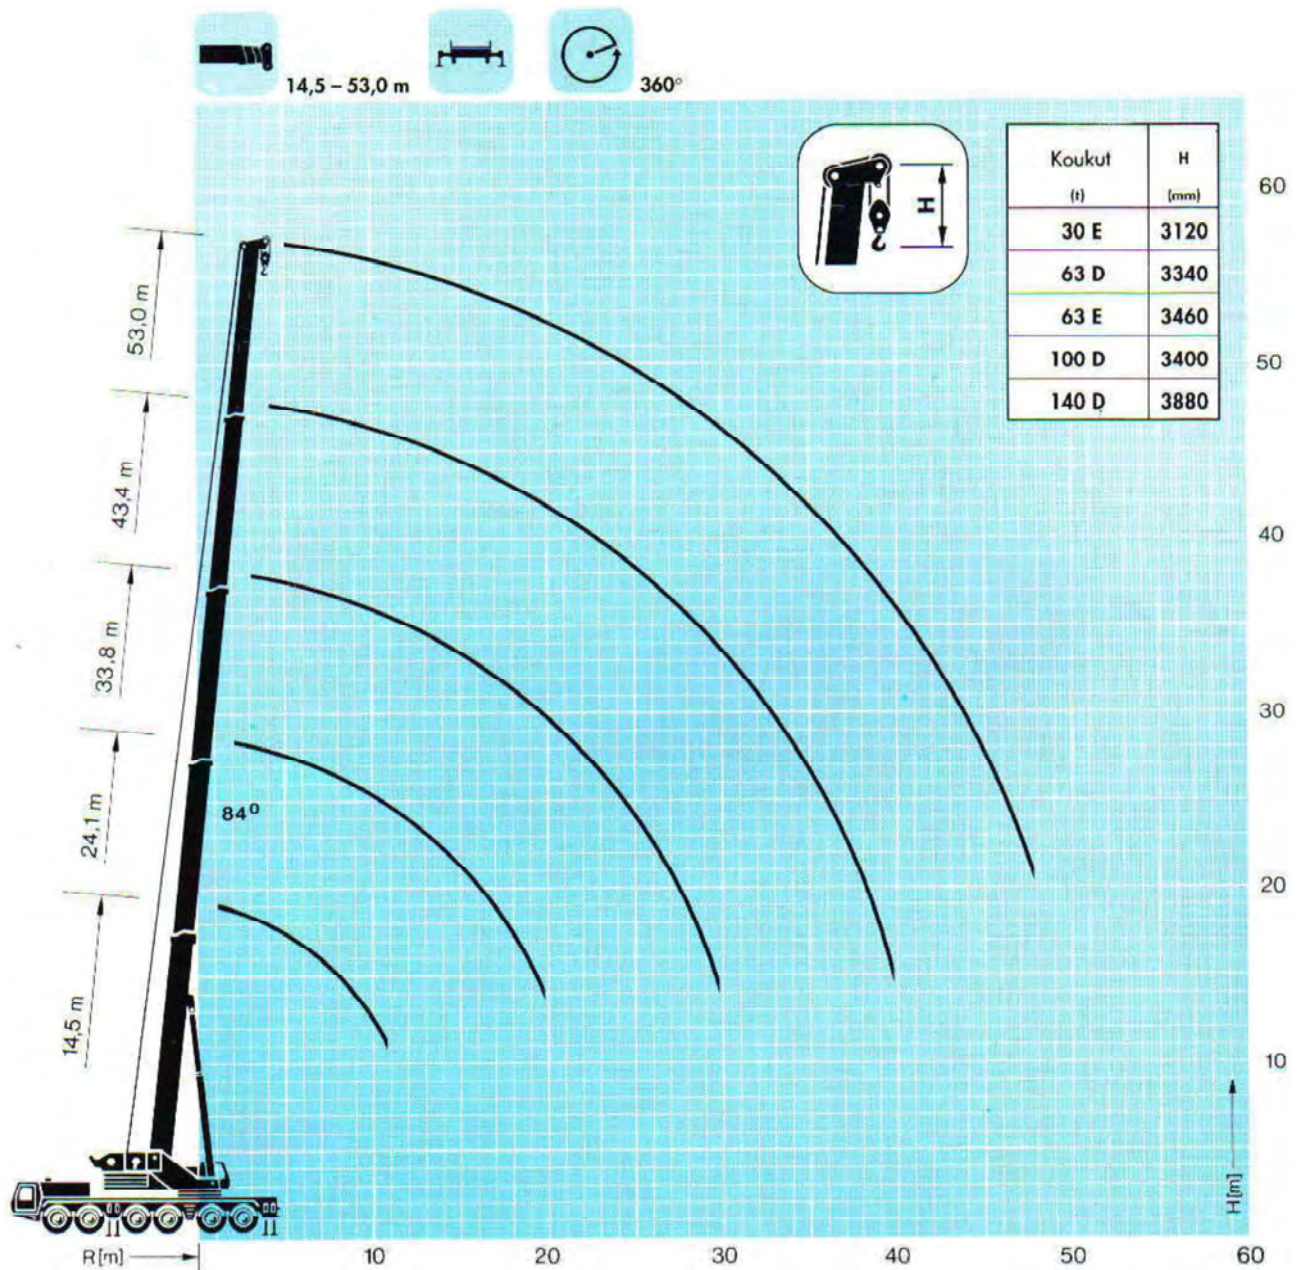

COTAC FINLAND

MAIN BOOM CAPACITY



14,5 – 53,0 m



360°

80 t

Puomin pituus													Säde
Säde	14,5 m*	14,5 m	19,3 m	24,1 m	29,0 m	30,9 m	33,8 m	40,5 m	43,4 m	50,1 m	53,0 m		
m	75%	75%	75%	75%	75%	75%	75%	75%	75%	75%	75%	m	
3	200,0**	173,0**	135,0**	125,0**	90,0							3	
4	172,0**	145,0**	135,0**	125,0**	90,0	78,0	80,0					4	
5	152,0**	125,0**	123,0**	123,0**	90,0	73,0	74,0	48,0				5	
6	127,0**	109,0**	107,0**	108,0**	86,0	67,0	68,0	48,0	41,0	31,0		6	
7	109,0**	96,0**	95,0**	95,0**	80,0	61,5	65,5	48,0	41,0	31,0	27,0	7	
8	94,5**	86,0**	84,5	85,0**	73,5	56,5	62,5	48,0	41,0	31,0	27,0	8	
9	83,5**	77,5	76,5	76,5	68,5	52,5	58,5	47,5	41,0	31,0	27,0	9	
10	74,5**	70,5	69,5	69,5	63,5	48,5	54,5	46,0	41,0	31,0	27,0	10	
11	67,0**	64,5	63,5	63,5	59,5	45,5	51,0	43,5	40,5	31,0	27,0	11	
12			58,5	58,5	56,0	42,5	48,0	41,0	38,5	31,0	27,0	12	
13			54,0	54,0	52,0	39,5	45,0	38,5	36,5	30,5	27,0	13	
14			49,5	50,0	48,5	37,0	41,5	36,0	34,0	29,5	27,0	14	
15			45,0	46,5	45,0	35,0	39,5	34,0	32,5	29,0	27,0	15	
16			41,0	42,5	41,5	33,0	37,5	32,5	31,0	27,5	27,0	16	
18				36,0	35,0	30,0	33,0	28,5	27,5	25,0	24,5	18	
20				31,0	30,0	27,0	30,0	26,0	25,0	23,0	22,5	20	
22					26,0	24,5	26,0	23,5	22,5	21,0	20,5	22	
24					22,5	22,5	22,5	21,5	20,5	18,9	19,2	24	
26						21,0	19,6	19,8	19,0	17,2	17,7	26	
28							17,3	18,0	17,3	15,8	16,2	28	
30							16,1	15,9	15,5	14,5	14,7	30	
32								13,9	14,3	13,4	13,8	32	
34								12,5	12,5	12,4	12,9	34	
36								11,7	11,3	11,4	12,0	36	
38									10,4	10,4	11,1	38	
40									9,6	9,4	10,2	40	
42										8,8	9,3	42	
44										7,9	8,3	44	
46										7,0	7,4	46	
48											6,6	48	
T1	0	0	50	50	0	100	0	100	0	100	0	100	T1
T2	0	0	0	50	100	50	100	100	100	100	100	100	T2
T3	0	0	0	0	0	0	70	0	100	70	100	100	T3
T4	0	0	0	0	0	0	0	0	0	70	0	100	T4

%

%



14,5 – 53,0 m





360°

60 t

Säde

14,5 m*

14,5 m

19,3 m

24,1 m

29,0 m

30,9 m

33,8 m

40,5 m

43,4 m

50,1 m

53,0 m

Puomin pituus

Säde

m

m	75 %	75 %	75 %	75 %	75 %	75 %	75 %	75 %	75 %	75 %	75 %	m
3	200,0**	168,0**	135,0	125,0	90,0							3
4	172,0**	141,0**	135,0	125,0	90,0	78,0	80,0					4
5	142,0**	121,0**	118,0	119,0	90,0	73,0	74,0	48,0				5
6	118,0**	106,0**	104,0	104,0	86,0	67,0	68,0	48,0	41,0	31,0		6
7	101,0**	93,5	92,5	92,5	80,0	61,5	65,5	48,0	41,0	31,0	27,0	7
8	88,0**	84,0	83,0	83,0	73,5	56,5	62,5	48,0	41,0	31,0	27,0	8
9	77,5**	76,0	75,0	75,0	68,5	52,5	58,5	47,5	41,0	31,0	27,0	9
10	69,5**	69,5	68,0	68,5	63,5	48,5	54,5	46,0	41,0	31,0	27,0	10
11	61,5**	61,5	60,5	61,0	59,5	45,5	51,0	43,5	40,5	31,0	27,0	11
12			53,5	55,0	53,5	42,5	48,0	41,0	38,5	31,0	27,0	12
13			48,0	49,5	48,0	39,5	45,0	38,5	36,5	30,5	27,0	13
14			43,5	44,5	43,5	37,0	41,5	36,0	34,0	29,5	27,0	14
15			39,5	40,5	39,5	35,0	39,0	34,0	32,5	29,0	27,0	15
16			36,0	37,0	36,0	33,0	35,5	32,5	31,0	27,5	27,0	16
18				31,5	30,0	30,0	30,0	28,5	27,5	25,0	24,5	18
20				26,5	25,0	27,0	25,0	26,0	25,0	23,0	22,5	20
22					21,0	24,0	22,5	22,0	22,5	21,0	20,5	22
24					17,5	20,5	20,5	18,6	19,0	18,9	19,2	24
26						17,6	17,9	16,7	16,2	17,2	17,7	26
28							15,6	15,5	15,0	15,5	15,9	28
30							13,6	14,4	13,8	13,5	13,9	30
32								13,4	13,0	11,8	12,2	32
34								11,9	12,1	10,3	10,7	34
36								10,6	10,9	9,0	9,4	36
38									9,8	7,8	8,2	38
40									8,7	6,8	7,2	40
42										5,9	6,3	42
44										5,1	5,4	44
46										4,3	4,6	46
48											4,0	48

T1

0

0

50

50

0

100

0

100

0

100

0

100

0

100

100

T1

T2

0

0

0

50

100

50

100

100

100

100

100

100

100

100

100

T2

T3

0

0

0

0

0

0

70

0

100

70

100

100

100

100

100

T3

T4

0

0

0

0

0

0

0

0

0

70

0

100

70

100


T4

%

%

*Perän yli, ** 8,65 x 6,30 m tukijalkavälillä. Yli 140 tonnin nostot erikoisvarusteilla. ▲ Vain 60 t vastapainolla.

EXTENSION JIB OUTREACH

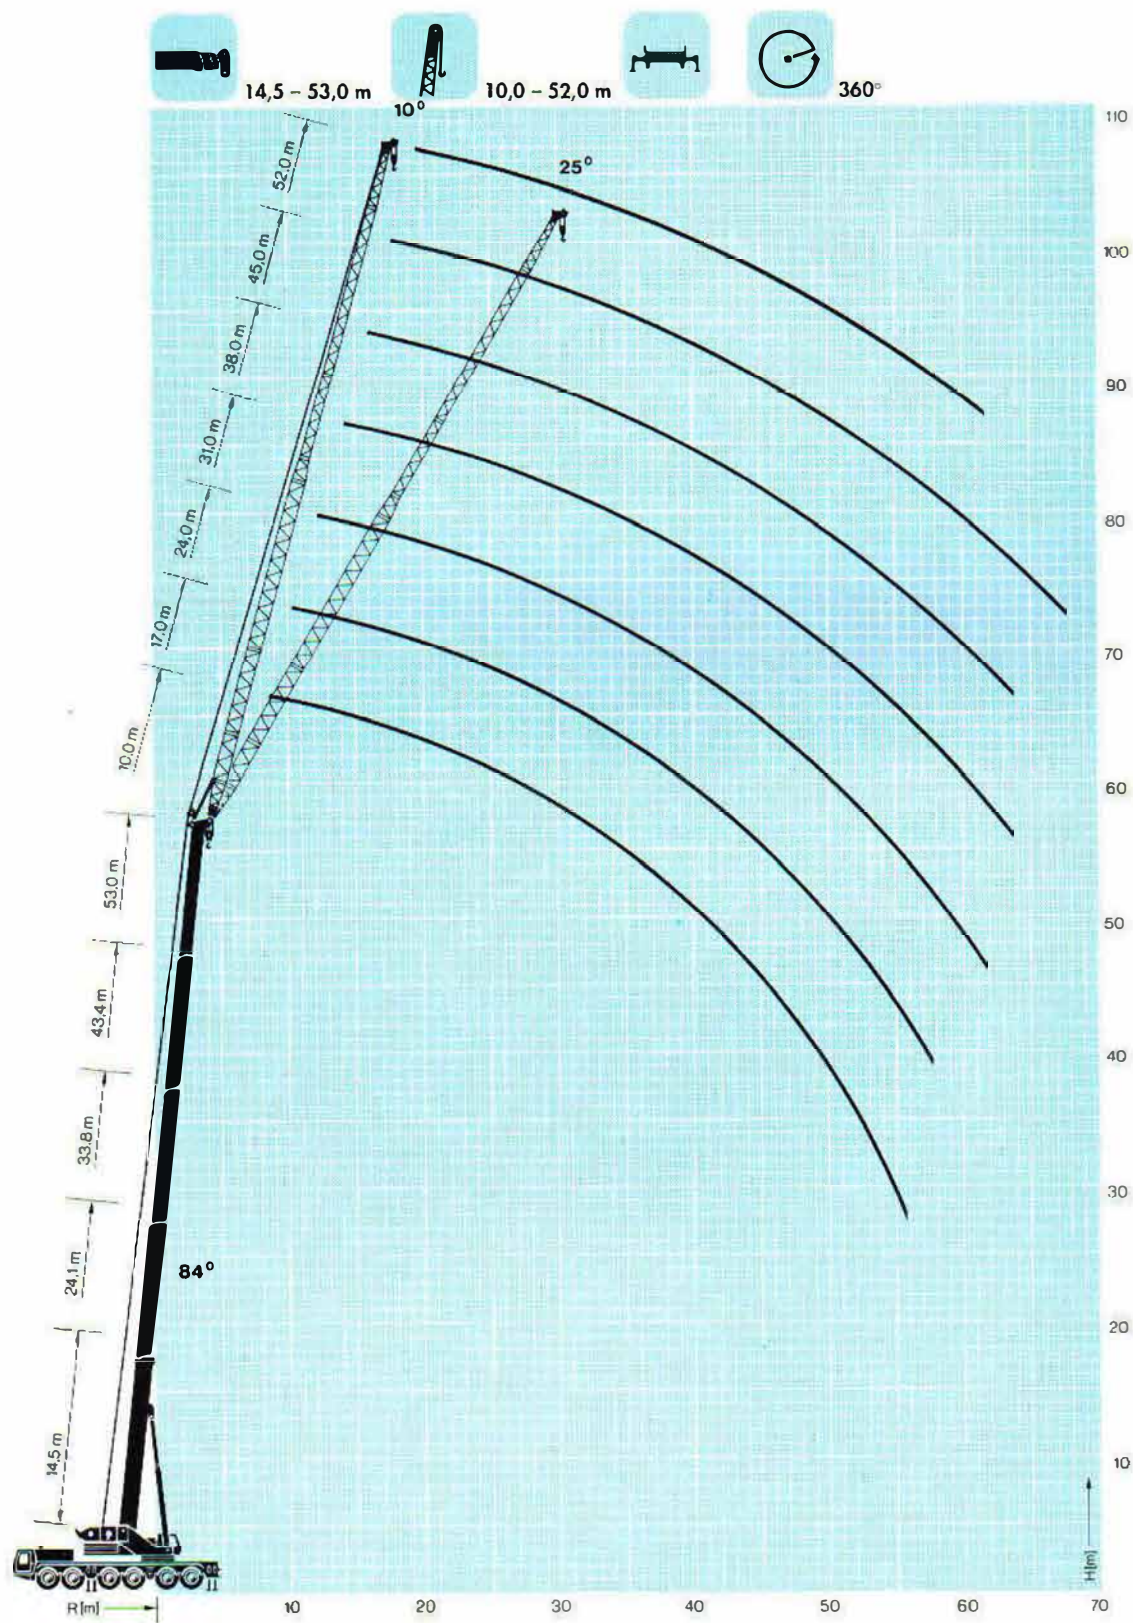

10.0 – 52.0 m

 360°

80 t

Säde		Pääpuomi 53,0 m						Säde
	10,0 m	17,0 m	24,0 m	31,0 m	38,0 m	45,0 m	52,0 m	
m	75%	75%	75%	75%	75%	75%	75%	m
8	16,2							8
9	16,2							9
10	16,2							10
11	16,2	12,5						11
12	16,2	12,1						12
13	16,2	11,6						13
14	15,5	11,2	8,3					14
15	14,9	10,7	8,0					15
16	14,3	10,3	7,8					16
18	13,3	9,7	7,3	5,6				18
20	12,5	9,1	6,9	5,4				20
22	11,8	8,6	6,6	5,2	4,4			22
24	11,2	8,2	6,3	5,0	4,2	2,8		24
26	10,8	7,9	6,0	4,8	4,0	2,7		26
28	10,3	7,6	5,8	4,6	3,9	2,6	2,1	28
30	10,0	7,4	5,6	4,5	3,8	2,5	2,1	30
32	9,7	7,1	5,5	4,4	3,7	2,4	2,0	32
34	9,5	7,0	5,3	4,3	3,6	2,4	1,9	34
36	9,3	6,8	5,2	4,2	3,5	2,3	1,9	36
38	9,2	6,7	5,1	4,1	3,5	2,3	1,9	38
40	8,5	6,6	5,0	4,0	3,4	2,2	1,8	40
42	7,9	6,5	5,0	4,0	3,4	2,2	1,8	42
44	7,4	6,5	4,9	3,9	3,3	2,1	1,8	44
46	6,8	6,1	4,9	3,9	3,3	2,1	1,7	46
48	6,3	5,9	4,9	3,8	3,2	2,1	1,6	48
50	5,6	5,6	4,7	3,8	3,2	2,1	1,5	50
52	4,9	5,2	4,5	3,8	3,2	2,0	1,4	52
54	4,2	4,7	4,3	3,6	3,0	2,0	1,3	54
56	3,6	4,1	4,1	3,4	2,9	2,0	1,2	56
58	3,0	3,5	3,9	3,2	2,7	1,9	1,1	58
60		2,9	3,6	3,0	2,5	1,8	1,0	60
62		2,4	3,1	2,9	2,4	1,7	0,9	62
64		2,0	2,6	2,8	2,3	1,6		64
66			2,2	2,4	2,1	1,5		66
68			1,8	2,0	2,0	1,4		68
70			1,3	1,6	1,8	1,4		70
72			0,9	1,2	1,4	1,2		72
74					1,0	1,1		74
76						1,0		76



10,0 – 52,0 m



360°

60 t

Säde	Pääpuomi						Säde	
	10,0 m	17,0 m	24,0 m	31,0 m	38,0 m	45,0 m		52,0 m
m	75 %	75 %	75 %	75 %	75 %	75 %	75 %	m
8	16,2							8
9	16,2							9
10	16,2							10
11	16,2	12,5						11
12	16,2	12,1						12
13	16,2	11,6						13
14	15,5	11,2	8,3					14
15	14,9	10,7	8,0					15
16	14,3	10,3	7,8					16
18	13,3	9,7	7,3	5,6				18
20	12,5	9,1	6,9	5,4				20
22	11,8	8,6	6,6	5,2	4,4			22
24	11,2	8,2	6,3	5,0	4,2	2,8		24
26	10,8	7,9	6,0	4,8	4,0	2,7		26
28	10,3	7,6	5,8	4,6	3,9	2,6	2,1	28
30	10,0	7,4	5,6	4,5	3,8	2,5	2,1	30
32	9,7	7,1	5,5	4,4	3,7	2,4	2,0	32
34	9,5	7,0	5,3	4,3	3,6	2,4	1,9	34
36	9,3	6,8	5,2	4,2	3,5	2,3	1,9	36
38	8,2	6,7	5,1	4,1	3,5	2,3	1,9	38
40	7,1	6,6	5,0	4,0	3,4	2,2	1,8	40
42	6,1	6,6	5,0	4,0	3,4	2,2	1,8	42
44	5,3	5,8	4,9	3,9	3,3	2,1	1,8	44
46	4,5	5,0	4,9	3,9	3,3	2,1	1,7	46
48	3,7	4,3	4,9	3,8	3,2	2,1	1,6	48
50	3,1	3,6	4,3	3,8	3,2	2,1	1,5	50
52	2,4	3,0	3,7	3,8	3,2	2,0	1,4	52
54	1,9	2,4	3,1	3,3	3,0	2,0	1,3	54
56	1,3	1,8	2,5	2,8	2,9	2,0	1,2	56
58		1,3	2,0	2,3	2,5	1,9	1,1	58
60			1,5	1,8	2,0	1,8	1,0	60
62			1,1	1,4	1,6	1,7	0,9	62
64				0,9	1,2	1,6		64
66						1,4		66
68						1,0		68

LUFFING JIB OUTREACH



24,1 - 47,2 m



21,0 - 63,0 m



360°

